


SERVICE DOOR – SERVİS KAPISI

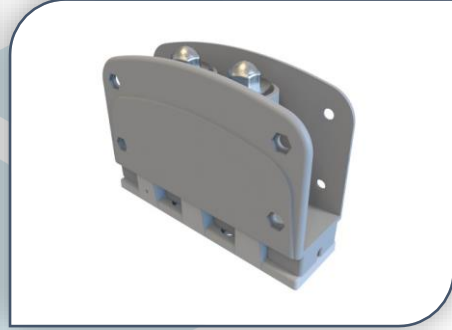

General Specifications

Frigo System semi-insulating (flip –flap) doors are designed for installation in air-conditioned rooms with minimum working temperatures $> 12^{\circ}\text{C}$, $\Delta\text{T} < 12^{\circ}\text{C}$ R.H. $< 60\%$. They can only be used as service doors and not for uses requiring a hermetic or thermal seal. They can be supplied for installation on panel or brick wall.

Technical Specifications

- Door panel thickness 4 cm consisting of two supports in prevarnished sheet metal, color white Ral 9010 sandwiched with polyurethane foam injected at high density. The hardware consists of 2 plastic hinges with return spring and a doorstop at 90° + crushproof gasket on the vertical edges. Transparent window in polycarbonate with round edges gasket (measures 30x60 cm).

Genel Özellikler

Frigo Sistem flip-flap (yarı yalıtımlı kapılar) minimum çalışma sıcaklıkları $> 12^{\circ}\text{C}$, $\Delta\text{T} < 12^{\circ}\text{C}$ R.H. $< 60\%$ olan klimalı odalara kurulum için tasarlanmıştır. Sadece servis kapıları olarak kullanılabilirler ve hermetik veya termal sızdırmazlık gerektiren kullanımlar için kullanılamazlar. Panele veya tuğla duvara montaj için tedarik edilebilirler.

Teknik Özellikler

Düz yüzeyli sacdan iki oluşan 4 cm kapı kanat kalınlığı, beyaz renk yüksek yoğunlukta poliüretan köpük ile sıkıştırılmış Ral 9002 boyalıdır. Donanım, dönüş yaylı 2 plastik menteşe ve dikey kenarlarda 90° + ezilmez contadan oluşur. Yuvarlak kenarlı contalı polikarbonat şeffaf pencere eklenebilir (30x60 cm ölçülerinde).

SERVICE DOOR – SERVİS KAPISI

- Frame in anodized aluminum with invisible fastening system.

- Counterframe in anodized aluminum with invisible fastening system

- Door side finishing is made of a rubber finger protection fixed on the door panel profile

- Gizli sabitleme sistemine sahip anodize alüminyum kasa.

- Kapı kasası kaplaması, kapı kanat profiline sabitlenmiş kauçuk parmak koruması yapılmıştır.

- Tekmelik eklenerek araç geçişini hızlandırabilir.

