


FLOOR PANEL – ZEMİN PANELİ

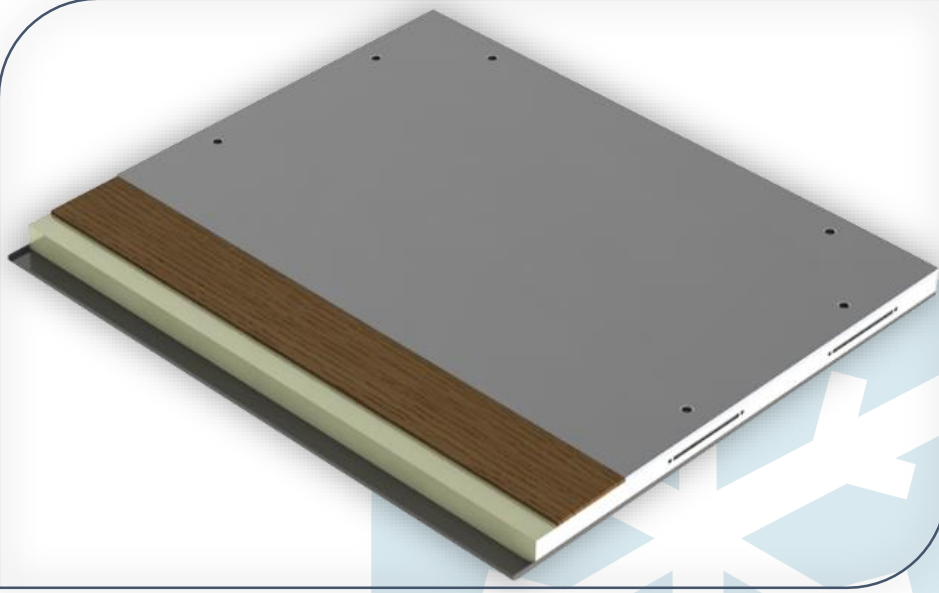


General Specifications

All our standard floors have an plywood non-slip with polyurethane (PUR) insulation featuring a density of 42 kg/m³ and a lower external finish in galvanised pre-painted sheet metal.

Additional finishes are available upon request: stainless steel 304 with linen finish or checkered aluminium surface. Thicknesses starting from 60 mm till 200 mm.

Technical Specifications

- 9 mm plywood (CTBX), coated with a brown slip resistant phenolic resin. The material used in the manufacture is Finnish birch wood.
- Static load 2500 kg/m²
- Precise load 100 kg /m²

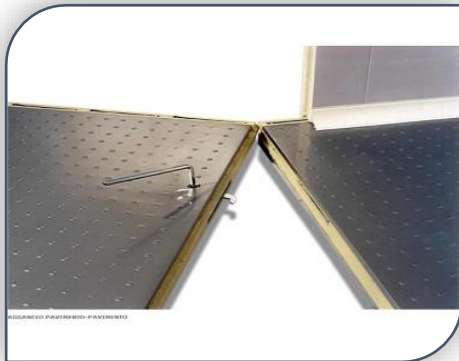

Genel Özellikler

Tüm standart zemin panellerinin üst yüzeyi PLYWOOD kaplı alt yüzeyi ise boyalı galvaniz saçtan imal edilmektedir. Yalıtım köpük yoğunluğu 42 kg /m³ tür. İstenilmesi durumunda kaymaz paslanmaz yüzeyli veya çeta alüminyum kaplamalı olarak üretilebilir. Panel kalınlığı 60 mm den başlayıp 200 mm ye kadar yapılmaktadır .

Teknik özellikler

- 9 mm Plywood (CTBX), kahverengi kaymaya dirençli fenolik reçine ile kaplanmıştır. İmalatta kullanılan malzeme huş ağacıdır.
- Statik yük 2500 kg / m²
- Kesin yük 100 kg / m²

