


DORUK 20 S / P / M 1EA

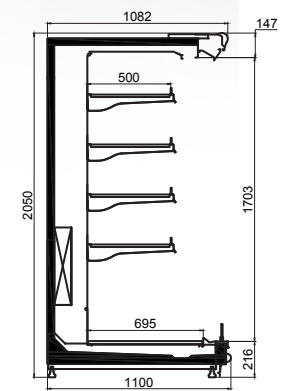

DORUK 20 S / P / M 2EA

Doruk 20/22


EA/B S/P/M

Duvar Tipi Teşhir Reyonu

Refrigerated Wall Cabinet

ÖLÇÜ BİRİMLERİ MEASUREMENTS	UZUNLUK LENGTH mm	DORUK 20 EA			DORUK 22 EA			DORUK 20 B DORUK 22 B		
		S1	P1	M1	S1	P1	M1	S2 (20)	M2 (20)	
DERİNLİK DEPTH										
ÇALIŞMA SICAKLIĞI OPERATING TEMPERATURE	°C	M2 (-1/+7°C)	M1 (-1/+5°C)	H1 (+1/+10°C)	M2 (-1/+7°C)	M1 (-1/+5°C)	H1 (+1/+10°C)	M2 (-1/+7°C)	H1 (+1/+10°C)	
RAF TEŞHİR ALANI (RAF + TABAN) SHELF DISPLAY AREA (SHELF + TRAY)	m2	1250	3.50	3.0	2.43	4.12	3.56	3.0	2.5	1.84
		1875	5.34	4.5	3.65	6.18	5.34	4.5	3.75	2.69
		2500	7.12	6.0	4.87	7.87	7.12	6.0	5.0	3.58
		3125	8.90	7.5	6.09	10.31	8.9	7.5	6.25	4.48
		3750	10.68	9.0	7.31	12.37	10.68	9.0	7.5	5.39
			S2	P2	M2	S2	P2	M2	S2 (22)	M2(22)
		1250	4.13	3.51	2.88	4.67	4.13	3.51	2.69	1.93
		1875	6.20	5.26	4.33	6.20	6.20	5.26	4.0	2.86
		2500	8.27	7.02	5.77	9.52	8.27	7.02	5.4	3.87
		3125	10.34	7.81	7.21	11.90	10.34	8.78	6.7	4.80
3750	12.41	10.53	8.66	14.28	12.41	10.53	8.0	5.73		
YAN KAPAK KALINLIĞI SIDE WALL THICKNESS	mm	40 x 2								
ÇEVRE SICAKLIĞI - SINIF AMBIENT TEMP. - UNIT CLASS	°C	EN ISO 23953-2 / CLASSE 3 - 25°C / %60 RH								

Ürettiğimiz ürünlerde önceden haber vermesizin değişiklik yapma, hakkımız saklıdır.
We reserve the right of modification for our products without any previous notice.

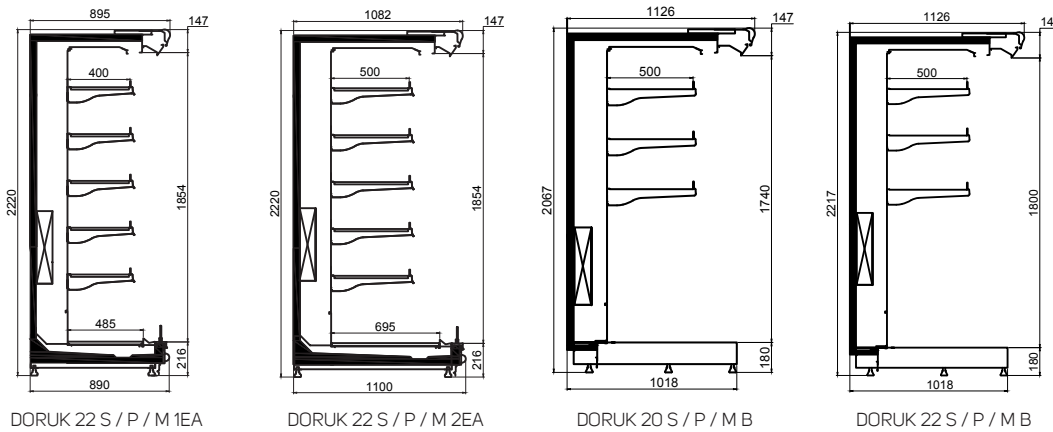

DORUK 22 S / P / M 1EA

DORUK 22 S / P / M 2EA

DORUK 20 S / P / M B

DORUK 22 S / P / M B

TR

- Çalışma sıcaklığı M1 (-1/+5), M2 (-1/+7) & H1 (-1/+10) ısı sınırı
- Sadece dıştan motorlu versiyon mevcut
- Ada şeklinde kurulum olanağı
- Geniş teşhir alanı ve tava
- Plastik koruyucu tampon
- Manuel ve motorlu gece perdesi seçenekleri
- Üstte standart tek sıra LED aydınlatma
- Raflarda LED aydınlatma seçeneği
- Açılı 400 mm, 420 mm, 450 mm ve 500 mm raf seçenekleri
- Elektrostatik boyalı ve paslanmaz raf seçenekleri
- Aynalı ve camlı yan kapak seçenekleri
- Raflar arası homojen hava dağılımı
- RAL renk seçenekleri
- Reyon başı seçenekleri

EN

- Available for M1 (-1/+5), M2 (-1/+7), H1 (-1/+10) temp. class
- Only remote version available
- Possibility to assemble as an island type
- Wide display area and base tray
- Plastic bumper protection
- Manuel, driven & master night curtain options
- Standard LED single row canopy lighting
- Optional LED under shelves lighting
- Inclined shelves with 400 mm, 420 mm, 450 mm, 500 mm, 600 mm length options
- Powder coated or stainless steel options for shelves
- Internally mirrored or glazed sidewalls
- Equal air flow between display shelves
- RAL color options
- Head unit options

